

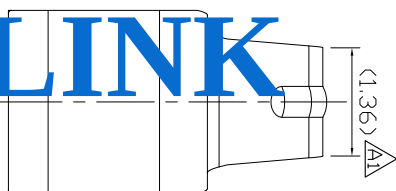


USED ON

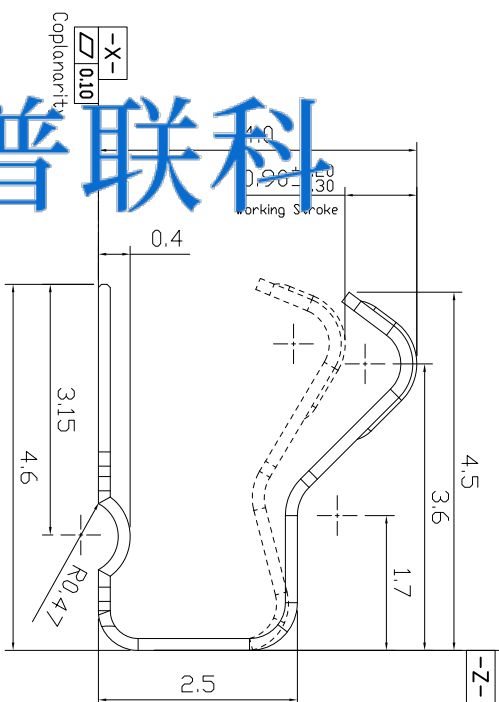

- NOTES
1. MATERIAL:
COPPER ALLOY, THICKNESS=0.15.
2. PLATING:
1.25um(SOU)*Min Ni UNDER PLATING.
0.025um(tiu)*Min Au PLATING OVER ALL

3. SPECIFICATION:

3.1 ELECTRICAL CHARACTERISTICS

CURRENT RATING : 10A,
VOLTAGE RATING : 50 VAC/DC,
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX

3.2 MECHANICAL CHARACTERISTICS:

CONTACT NORMAL FORCE: 50gf min PER PIN AT

DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE

WITHOUT DEGRADING

3.3 ENVIRONMENTAL CHARACTERISTICS:

OPERATING TEMPERATURE RANGE : -20°C TO +70°C


4. TAPE & REEL PACKAGING PER EIA481 STANDARD

5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009


6. HARMFUL MATERIAL CONTROL FOLLOW "ROHS"

拓普联科

TOP-LINK

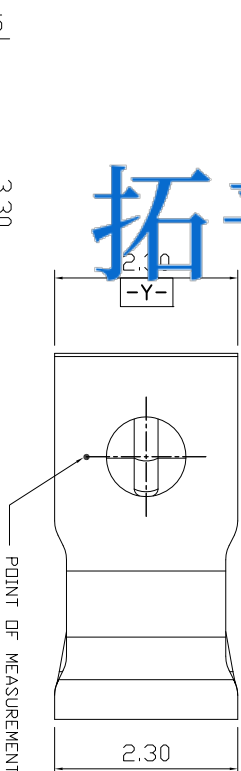

PAD OF PCB

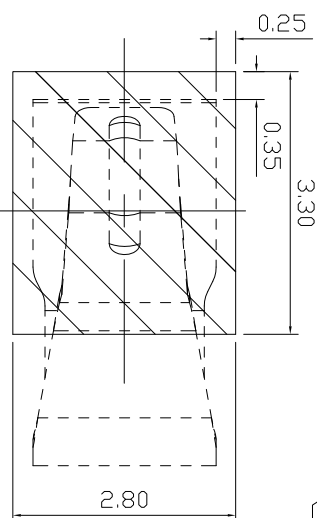

AI	Update	2015/11/06
A	NEW	
LTR	REVISION RECORD	APVD DATE

200018-1		2	CARRIER TAPE	P=6mm	WHITE=12mm O/V/REL=1800 Pcs	
1		4.0H 2.3W	ANTENNA CLIPS	1Pcs	NOTES 1,2	
ASSEMBLY NUMBER		ITEM	PART NAME	QTY	DESCRIPTION	
DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			MATL	HT TR		FIN
0 = ±			DWN	1		—
0.0 = ±0.15			Caiwan Lu		APVD	Lansing
0.00 = ±0.10			CHK	REL		Top-Link Electronics
ANGLE:			Kent		Top-Link Electronics Ltd.	
0 = ±3°			NAME			
0.0 = ±1.5°			CUSTOMER DRAWING FOR 4. 0H, 2. 3W, ANTENNA CLIPS			
REMOVE BURRS, BREAK SHARP EDGES R0.10 MAX		SCALE	1:1	A4	DWG NO.	C-200018
DO NOT SCALE PRINT		SHEET 1 OF 1		REV A1		