
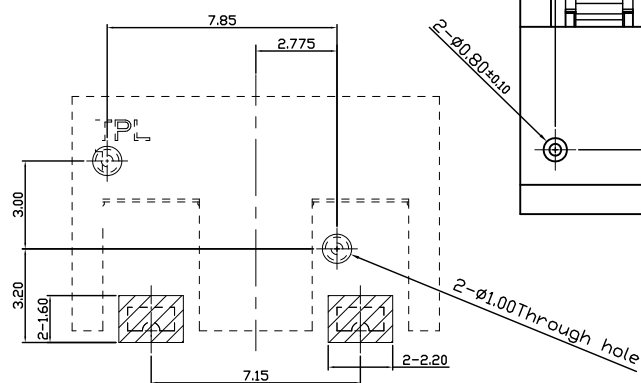
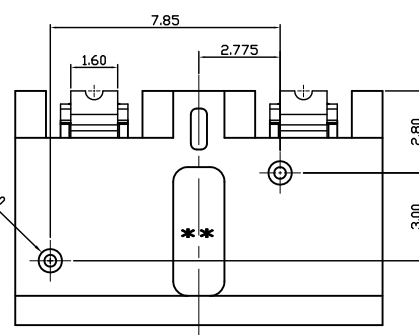
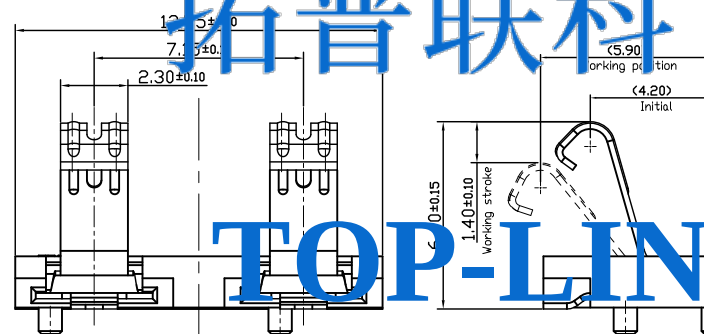

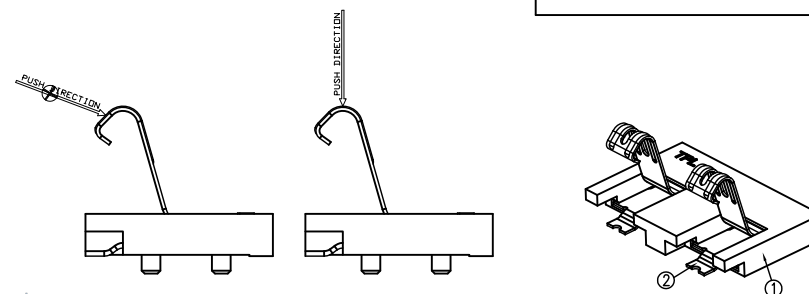


USED ON

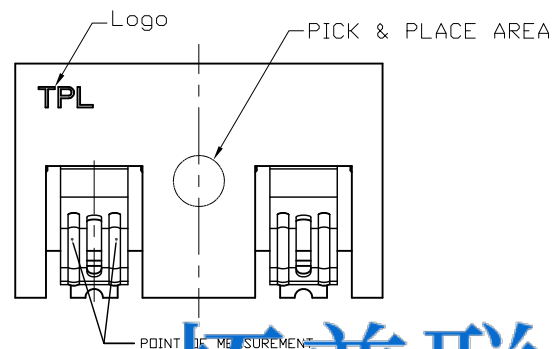

 Solder pads
RECOMMEND PCB LAYOUT
 TOLERANCE=±0.05

LOC	-
DIST	-

LTR	REVISION RECORD	APVD	DATE

- NOTES:
1. SPECIFICATION:
 - 1.1 ELECTRICAL CHARACTERISTICS:
VOLTAGE RATING : 200V AC/DC
CURRENT RATING:3.0A
LOW LEVEL CONTACT RESISTANCE:50mΩ Max.
 - 1.2 MECHANICAL CHARACTERISTICS:
CONTACT NORMAL FORCE:250gf MIN PER PIN
WORKING POSITION
DURABILITY : MATED 5,000 CYCLES AT WOR
WITHOUT DEGRADING
 - 1.3 ENVIRONMENTAL CHARACTERISTICS:
OPERATING TEMPERATURE RANGE : -20°C TO
 2. TAPE & REEL PACKAGING PER EIA481 STANDARD
 3. DIMENSION SHALL BE INTERPRETED PER ASME
 4. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

			PART NUMBER		200050-2					
3	CARRIER TAPE	12mm	TRANSPARENCY							
2	CONTACT	2	COPPER ALLOY,Contact area:10u"Min,Au:1u"Min Over all.							
1	HOUSING	1	HIGH TEMPERATURE THERMAL PLASTIC							
ITEM	PART NAME	QTY	DESCRIPTION							
DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ±- 0.0 = ±0.15 0.00 = ±0.10 ANGLE: 0 = ±3° 0.0 = ±2° REMOVE BURRS, BREAK SHARP EDGES R0.10 MAX DO NOT SCALE PRINT			MATL 		HT TR —		FIN — 			
			DWN		APVD		 Top-Link Electronics Ltd.			
			CHK		REL					
			NAME						CUSTOMER DRAWING FOR 6.4H 2PIN BATTERY	
1:1			A4		DWG NO. C200050		SHEET 1 OF 1		REV A	